





06



## Woodworking Tools and Heat Guns

- Engineered, designed and manufactured in Germany
- Unique designs and features
- High performance
- Saves you time and money




**SXE 450 TurboTec**  
6" Dual Random Orbit Sander

Model	SXE 450 TurboTec 600129420
Variospeed (V) electronics	•
Power control system	•
Turbo boost	•
Dual orbit setting	•
Integral dust collection	•
Auto-stop brushes	•
Double insulated	•
Sanding pad size	6" round (6 hole)
Sheet size	6" round
Orbits per minute	8,400 - 22,000
Orbit size	1/8" or 1/4"
Amps	3.4
Rated input watts	350
Carrying case	623894000 (optional)
<b>Standard equipment:</b>	Dust bag (344101410) Medium hard hook & loop pad Backing pad (630262000) Hexagon key (344161520)
<b>Dual Orbit Settings:</b>	• 1/8" orbit for fine finishing • 1/4" orbit for fast stock removal



**SXE 400**  
Compact Orbital Disc Sander

Model	SXE 400 600405420
Variospeed (V) electronics	•
Power Control System	•
Auto-stop brushes	•
Double insulated	•
Sanding pad size	3 1/8" round (6 hole)
Sheet size	3 1/8" round
Orbits per minute	5,000 - 10,000
Orbit size	1/8"
Amps	2
Rated input watts	220
Carrying case	623898000 (optional)
<b>Standard equipment:</b>	Hexagon key (344161530) Hook & loop backing pad (624064000) Intermediate disc (624061000)
<b>Optional equipment:</b>	Vacuum hose adaptor (624996000)

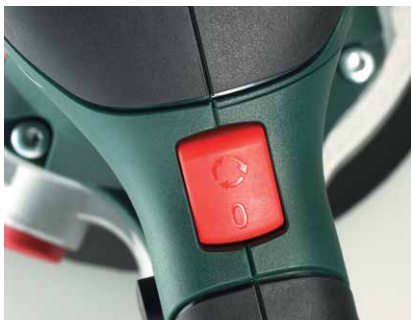

**Turbo Boost**  
for fastest removal of stock!





ORBITAL SANDER ACCESSORIES

For SXE 400 **Order #**

 **Hook & loop-faced intermediate disc** 624061000


 **"Cling-fit" Replacement Backing pad** 624064000

 **"Cling-fit" lambs wool polishing disc** 624063000

 **"Cling-fit" sanding discs. Ready-punched, Aluminum Oxide**


Packs of 10  
 P 40 grit 624041000  
 P 60 grit 624042000  
 P 80 grit 624043000  
 P 100 grit 624044000  
 P 120 grit 624045000  
 P 180 grit 624046000  
 P 240 grit 624047000  
 P 320 grit 624048000


Packs of 25  
 P 40 grit 624051000  
 P 60 grit 624052000  
 P 80 grit 624053000  
 P 100 grit 624054000  
 P 120 grit 624055000  
 P 180 grit 624056000  
 P 240 grit 624057000  
 P 320 grit 624058000  
 P 400 grit 624059000


 **Accessory Assortment** 624060000  
 Package includes:  
 10 Pieces- P 60  
 10 Pieces- P 80  
 5 Pieces- P 120

 **Adaptor** 624996000 **NEW**  
 Vacuum Adaptor 35mm for SXE400

For SXE 450 **Order #**


 **Backing Pads**  
 6" medium hard (6 hole) 631158000  
 6" soft (6 hole) 631156000  
 PSA Pad-6" (6 hole) 631169000

 **"Cling-fit" intermediate disc (not perforated)**  
 soft, well suited for sanding rounded surfaces  
 6" 624037000

 **6" "Cling-fit" sanding discs**  
 (packs of 5)  
 Grit 6" (6 hole)  
 A40 624001000  
 A60 624002000  
 A80 624003000  
 A100 624004000  
 A120 624005000  
 A180 624006000  
 A240 624007000  
 A320 624008000


(packs of 25)  
 Grit 6" (6 hole)  
 A40 624019000  
 A60 624020000  
 A80 624021000  
 A100 624022000  
 A120 624023000  
 A180 624024000  
 A240 624025000  
 A320 624026000  
 A400 624027000


**6" Sanding Assortment** 624066000  
 Package includes:  
 10 Pieces- P 60  
 10 Pieces- P 80  
 5 Pieces- P 120


 **"Cling-fit" polishing sponge**  
 6" 631233000


 **"Cling-fit" lambs-wool polishing disc**  
 6" 631217000

**Order #**


 **Hook & Loop Backing Pad (for FSX200)** 625658000

 **Hook & Loop Backing Pads**  
 5" medium hard (8 hole) 631219000  
 5" soft (8 hole) 631220000  
**(for SXE425)**


 **"Cling-fit" Intermediate Disc (not perforated)**  
 soft, well suited for sanding rounded surfaces  
 5" 631216000


 **"Cling-fit" Sanding Discs**  
 (packs of 5)  
 Grit 5" (8 hole)  
 A40 631226000  
 A60 631227000  
 A80 631228000  
 A120 631229000  
 A180 631230000


(packs of 25) 5" (8 hole)  
 A40 631584000  
 A60 631585000  
 A80 631586000  
 A120 631587000  
 A180 631588000  
 A240 631589000  
 A320 631596000  
 A400 631597000


 **"Cling-fit" polishing sponge**  
 5" 631222000

 **"Cling-fit" lambs-wool Polishing Disc**  
 5" 631223000

 **Spare Paper Dust Bags (5 per pack) (for Sr356, Sr358, SXE425 SXE450 Duo)** 631288000

 **Canvas Dust Bag (for Sr356, Sr358, SXE425 SXE450 Duo)** 631235000


 **Vacuum Hose** 631751000  
 6' x 1 1/2" diameter and 2 1/4" vacuum connection. Tapered end fits directly into tool's extraction port.

 **Vacuum Hose** 631362000  
 11.5' x 1 1/2" diameter and 2 1/4" vacuum connection. Tapered end fits directly into tool's extraction port.

For SXE 450

**"Professional Series" for working with metal and wood**


**6" "Cling-fit" sanding discs. Ready-punched, for Wood and Metal**


 **6" "Cling-fit" sanding discs. Ready-punched, for Wood and Metal**  
 Packs of 50  
 P 40 grit 626674000  
 P 60 grit 626675000  
 P 80 grit 626676000  
 P 100 grit 626677000  
 P 120 grit 626678000  
 P 180 grit 626679000  
 P 240 grit 626680000  
 P 320 grit 626681000  
 P 400 grit 626682000

**6" Backing Pad** 630262000

**"Professional Series" for working with paints and varnishes**

**6" "Cling-fit" sanding discs. Ready-punched, for paints and varnishes**

 **6" "Cling-fit" sanding discs. Ready-punched, for paints and varnishes**  
 Packs of 50  
 P 40 grit 626683000  
 P 60 grit 626684000  
 P 80 grit 626685000  
 P 100 grit 626686000  
 P 120 grit 626687000  
 P 180 grit 626688000  
 P 240 grit 626689000  
 P 320 grit 626690000  
 P 400 grit 626691000

 **6" "Cling-fit" intermediate disc**  
 well suited for sanding rounded surfaces 630260000

# JIGSAW/PAINT REMOVER AND ACCESSORIES




**STEB 140**  
Variable Speed Jigsaw  
with Orbit

Model	STEB 140 601402420
Electronics	Vario-tacho-constamatic (VTC)
Aluminum die-cast gear housing	•
Variable speed controlled by adjusting dial	•
Electronic speed stabilizer	•
Orbital saw-blade movement for fast cutting	3-stage
Grooved needle-bearing roller-guide prevents the blade from wandering, allowing for truer cuts. Suitable for bevel cuts. Rapid setting of the sole plate for bevel angles of 22.5° & 45° left or right	•
Uses T-shank style blades	•
Sawdust is blown from line of cut for better visibility	•
Auto-stop carbon brushes	•
Quick blade change system with auto eject	•
Maximum torque	62 inch lbs.
Maximum thickness of material	
- wood	5 1/2"
- non-ferrous metal	1 3/8"
- sheet steel	3/8"
Rated input watts/amps	720/7.0
No-load speed (SPM)	1,000-3,100
Length of stroke	1"
Orbital settings	3 position
Carrying case	344454150 (optional)
<b>Standard equipment:</b>	Allen wrench (344161530)
<b>Optional equipment:</b>	Anti-splintering sole plate insert (631208000)
	Circle Guide (631340000)




**LF 724 S**  
Paint Remover

Model	LF 724 S 600724420
Double insulation	•
Environmentally friendly method of paint and varnish removal	•
Highly suitable for handling rabbets	•
Continuous adjustment of chip removal: 0-.012"	•
Reversible all-carbide blades with long service life	•
Low vibration reduces fatigue	•
Minimal dust creation	•
Encased aluminum die-cast gear housing	•
High-performance palloid gear system	•
Maximum torque	18 inch lbs.
Blade cutting circle diameter	3 1/8"
Maximum rabbet height	1 1/10"
Axial cutting depth	0-.012" (0-.3mm)
Radial cutting depth	.006"
Rated input watts/amps	710/6.0
No-load speed (RPM)	10,000
Carrying case	623860000 (standard)
<b>Standard equipment:</b>	4 indexable solid tungsten carbide blades - 4 cutting edges per blade
	Vacuum adaptor (343371390)
	Combination wrench(344162450)
	Cleaning pick (344162540)

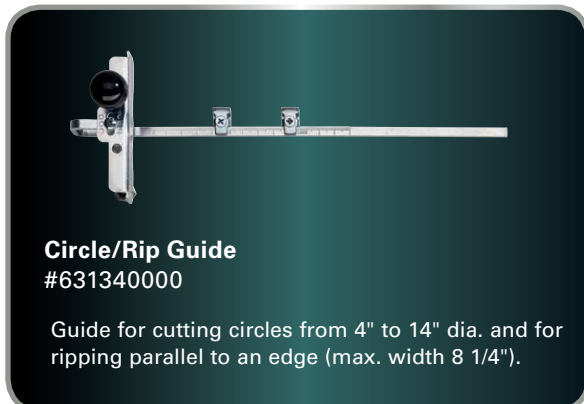

**Circle/Rip Guide**  
#631340000

Guide for cutting circles from 4" to 14" dia. and for ripping parallel to an edge (max. width 8 1/4").

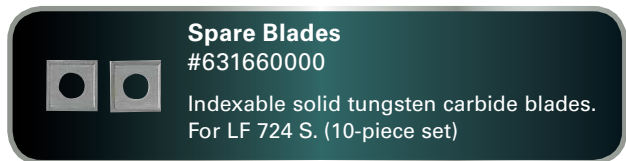

**Spare Blades**  
#631660000

Indexable solid tungsten carbide blades. For LF 724 S. (10-piece set)



Back View of Heat Gun



Back View of Heat Gun



Back View of Heat Gun



**STANDARD EQUIPMENT FOR HG 18 LTX 500**

**630004000**  
Wrap around nozzle

**630005000**  
Reducing nozzle

**HG 16-500**  
2-Stage Variable Temperature Heat Gun

**HE 20-600**  
Electronic 3-Stage Variable Temperature Heat Gun

**HG 20-600**  
Digital Programmable 2-Stage Variable Temperature Heat Gun

**HG 18 LTX 500**  
18V Cordless Dual Temperature Heat Gun

Model	HG 16-500 601067420	HE 20-600 602060420	HG 20-600 602066420
Double insulation	•	•	•
Temperature levels via thumb wheel	•	•	
Non-slip pads for stationary use	2	Infinitely variable	9
One handed temp adjustment	•	•	•
Thermal fuse for safety	•	•	•
Rated input watts	1,300	1,500	2,000
Rated Amps	10.8	12.5	12.5
Air Flow	7.5 / 12.5 CFPM	5.3 / 10.6 / 17.7 CFPM	3.8 / 7.8 / 13.2 CFPM
Air Temperature	570-930 °F	122/122-1100 °F	180-1100 °F

Model Bare Tool:	HG 18 LTX 500 610502850
LED Light	•
Temperature regulation via thumb wheel	•
Batteries	Compatible with Metabo Lilon or LiHD batteries
Runtime (8.0 Ah Battery)	20+ minutes
Temperature range	570 °F - 930 °F
Time to temperature	5 sec (572 °F)
Air Flow/Volume	6-7 CFM
Carrying case (optional)	
Tool weight (lbs) without batteries	1.1 lbs.
<b>Standard Equipment:</b>	
Wrap around nozzle	630004000
Reducing nozzle	630005000

## HEAT GUN ACCESSORIES



**630001000**  
**Wide jet nozzle- 2"**  
Drying, stripping old coats of paint

**630002000**  
**Wide jet nozzle- 3"**  
Stripping old coats of paint from large surfaces



**630003000**  
**Deflector Nozzle**  
Stripping old coats of paint from window frames, waxing and de-waxing skis



**630004000**  
**Air-wrap Nozzle**  
Heating plastic tubes prior to bending them; shrinking of shrink-fit plastic sleeves



**630005000**  
**Reducing Nozzle- 3/8" dia.**  
Spot Heating

**630022000**  
**Reducing Nozzle-3/4" dia.**



**630007000**  
**Plastic Welding Tip**